
phs memory®

32GB Computer memory DDR3 for HP ProLiant BL620c Gen7 (G7) RDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

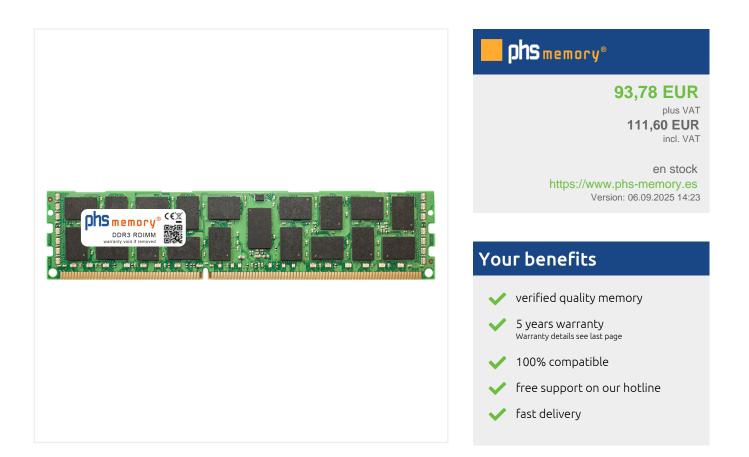

Memory Specification

-	- 133.35mm		
DR3 RDIMM Warranty void if removed		17.3mm 9.5mm	30mm

32GB
DDR3
ja
PC3-10600R
2Gx4
4Rx4 (4DRx4 DDP)
RDIMM (ECC Registered)
240 Pin DIMM
1333MHz @ CL9
DDP
133,35 x 30 (LxB mm)
0° C - 85° C
-40° C - +95° C
Yes
SP169772
4055069396478

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	HP
Device type	Server
Device family	ProLiant
Device series	BL620 Serie
Device name	ProLiant BL620c Gen7 (G7)
Maximum memory*	1TB
Number of memory sockets	32

* The specifications for the maximum memory upgrade may differ from those of the manufacturer HP. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Information on memory allocation

Computer memory configuration

Our memory team will be happy to help you choose the right memory and configure your server.

Principles of memory assembly

- The memory slots are organized in groups of 4
- Eine Bestückung with weniger als 4 memoryn ist nicht empfehlenswert
- Es können nur die memorysteckplätze genutzt werden, bei denen die jeweilige CPU vorhanden ist.

Memory configuration for good system performance

- Optimale Performance erreichen Sie bei Einsatz of 8 or 16 identischen memory pro CPU. The memories should be used per CPU via two memory boards
- The memory should be populated identically per CPU (mirrored to the other CPU).

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.

Further memory options for HP ProLiant BL620c Gen7 (G7)

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
8GB	SP169774	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	500662-B21
16GB	SP169771	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	627812-B21
32GB	SP169772	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	627814-B21

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.es/-W5Y



phs memory®

Contact Information

PHS-electronic gmbh - www.phs-memory.es -Karl-Götz-Str. 5 97424 Schweinfurt Alemania Phone: +49 9721 784678 E-Mail: info@phs-memory.es Web: www.phs-memory.es

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.es