
phs memory®

256GB Computer memory DDR4 for Fujitsu Primergy BX2580 M2 RDIMM 3DS



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

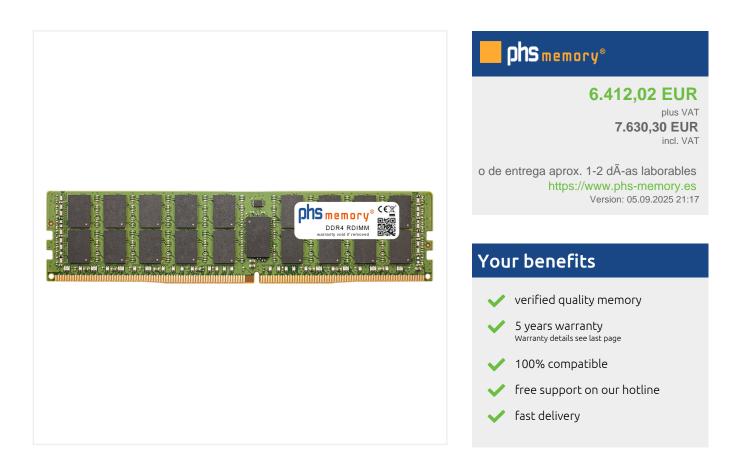

Memory Specification



| Memory size | 256GB |
|---------------------------|----------------------------|
| Memory technology | DDR4 |
| ECC support | yes |
| JEDEC Norm | PC4-25600-R |
| DRAM Organization | 3DS 4H 16Gx4 |
| Rank | 8Rx4 (2S4Rx4) |
| Туре | RDIMM (ECC Registered) 3DS |
| Number of pins | 288 Pin DIMM |
| Memory data transfer rate | 3200MHz @ CL22 |
| Voltage | 1,2 Volt |
| Speciality | 3DS |
| Board dimensions | 133,35 x 31,25 (LxB mm) |
| Operating temperature | 0° C - 85° C |
| Storage temperature | -40° C - +95° C |
| RoHS compliant | yes |
| SKU | SP464087 |
| EAN | 4067488275999 |

overRAMing maximize your RAM



Most systems - including the Fujitsu Primergy BX2580 M2 - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.es/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

| System manufacturer | Fujitsu |
|--------------------------|--|
| Device type | Server |
| Device family | Primergy |
| Device series | BX2500 Serie |
| Device name | Primergy BX2580 M2 |
| Maximum memory* | 6TB / 1,5TB according to manufacturer |
| Number of memory sockets | 24 |
| Annotation | Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed By upgrading, you should therefore know which memories already exist or upgrade completely with LRDIMM memory. |

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Fujitsu. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Computer memory Bestückung BX2560 M2

- Das serverBoard D3321 im BX2580 M2 verfügt über insgesamt 24 memorysteckplätze.
- Es können nur die memory slots genutzt werden, deren zugehörige CPU gesteckt ist.
- Die Maximalkapazität of 1,5TB erreichen Sie with 24 x 64GB LR DIMM.
- RDIMM memory and LR DIMM memory sind technisch nicht witheinander kompatibel. Sie können deshalb diese beiden Technologien nicht gemischt im server witheinander betreiben.

Für weitere Fragen zur spezifischen Bestückung Ihres servers helfen wir Ihnen gerne weiter.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible



General installation instructions are supplied by E-Mail.



Further memory options for Fujitsu Primergy BX2580 M2

| 8GBSP159208DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®16GBSP159206DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®32GBSP341746DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®64GBSP159205DDR4LRDIMM (ECC Registered)288 Pin DIMMPHS-memory®64GBSP464085DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®64GBSP464085DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®128GBSP464086DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®128GBSP464083DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®128GBSP464083DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®128GBSP464083DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®128GBSP464087DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®128GBSP464087DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory® | Size | SKU | Technology | Туре | Number of pins | Brand | Reference no. |
|---|-------|----------|------------|------|----------------|-------------|---------------|
| Registered)32GBSP341746DDR4RDIMM (ECC Registered)288 Pin DIMMPHS-memory®64GBSP159205DDR4LRDIMM (ECC LR DIMM)288 Pin DIMMPHS-memory®64GBSP464085DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464086DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464086DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464083DDR4LRDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®256GBSP464087DDR4RDIMM (ECC R DIMM (ECC R DIMM (ECC R DIMM) 3DS288 Pin DIMMPHS-memory® | 8GB | SP159208 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |
| Registered)64GBSP159205DDR4LRDIMM (ECC LR DIMM)288 Pin DIMMPHS-memory®64GBSP464085DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464086DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464083DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464083DDR4LRDIMM (ECC LR DIMM) 3DS288 Pin DIMMPHS-memory®256GBSP464087DDR4RDIMM (ECC REDIMM (ECC | 16GB | SP159206 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |
| LR DIMM)64GBSP464085DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464086DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464083DDR4LRDIMM (ECC LR DIMM) 3DS288 Pin DIMMPHS-memory®256GBSP464087DDR4RDIMM (ECC Redistered) 3DS288 Pin DIMMPHS-memory® | 32GB | SP341746 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |
| Registered) 3DS128GBSP464086DDR4RDIMM (ECC Registered) 3DS288 Pin DIMMPHS-memory®128GBSP464083DDR4LRDIMM (ECC LR DIMM) 3DS288 Pin DIMMPHS-memory®256GBSP464087DDR4RDIMM (ECC LR DIMM) (ECC288 Pin DIMMPHS-memory® | 64GB | SP159205 | DDR4 | `` | 288 Pin DIMM | PHS-memory® | |
| Registered) 3DS128GBSP464083DDR4LRDIMM (ECC LR DIMM) 3DS288 Pin DIMMPHS-memory®256GBSP464087DDR4RDIMM (ECC 288 Pin DIMM288 Pin DIMMPHS-memory® | 64GB | SP464085 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |
| LR DIMM) 3DS 256GB SP464087 DDR4 RDIMM (ECC 288 Pin DIMM PHS-memory® | 128GB | SP464086 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |
| | 128GB | SP464083 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |
| | 256GB | SP464087 | DDR4 | | 288 Pin DIMM | PHS-memory® | |
| 256GB SP464084 DDR4 LRDIMM (ECC 288 Pin DIMM PHS-memory® LR DIMM) 3DS | 256GB | SP464084 | DDR4 | • | 288 Pin DIMM | PHS-memory® | |

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.es/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.es -Karl-Götz-Str. 5 97424 Schweinfurt Alemania Phone: +49 9721 784678 E-Mail: info@phs-memory.es Web: www.phs-memory.es

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online



shop at https://www.phs-memory.es